

PLATE COMPACTOR

DOOSAN



DOOSAN PLATE COMPACTOR

Pack down soil, gravel, asphalt and aggregate efficiently, easily and safely with this high-performance attachment.

Safer Than Hand-Held Compactors

- No need for a crew to work inside the trench

Standard Flow Control Valve

- Standard on all models
- Prevents over speeding which leads to poor compaction and reduces bearing life

Direct Drive Heavy-Duty Motor


- Provides ample power, maximum durability and easy maintenance

Four Outboard Shock Mounts

- Distribute vibration evenly
- Improve compaction efficiency
- Extend component life

Flat Top Mount Design

- Allows the same plate compactor to be mounted to different carriers

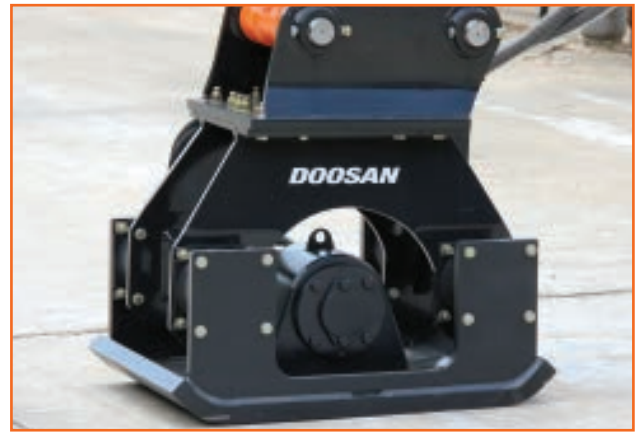

		PCX64	PCX114	PCX220
Approved Doosan® Carriers	DX60	X		
	DX80	X		
	DX140	X	X	
	DX180		X	
	DX190W		X	
	DX210W		X	
	DX225		X	
	DX255		X	X
	DX300			X
	DX350			X
	DX420			X
	DX480			X
DX520			X	

	PCX64	PCX114	PCX220
Recommended Carrier Weight	9920 - 33,070 lb. (4.5 - 15.0 tons)	15,870 - 55,115 lb. (7.2 - 25.0 tons)	54,000 - 143,300 lb. (24.5 - 65.0 tons)
Operating Weight	825 lb. (374 kg)	1425 lb. (646 kg)	2200 lb. (998 kg)
Flow Range	13 - 24 gal./min. (49 - 91 L/min.)	24 - 30 gal./min. (49 - 114 L/min.)	24 - 42 gal./min. (91 - 159 L/min.)
Dynamic Force	6400 lb. (2903 kg)	11,350 lb. (5148 kg)	22,000 lb. (9980 kg)
Frequency	2000 vpm	2000 vpm	2100 vpm
Baseplate Size	23 in. x 31 in. (584 mm x 787 mm)	27 in. x 35 in. (686 mm x 889 mm)	32 in. x 45 in. (813 mm x 1143 mm)
Height	24.0 in. (610 mm)	29.0 in. (737 mm)	41.3 in. (1049 mm)
Width	23.0 in. (584 mm)	27.0 in. (686 mm)	32.0 in. (813 mm)
Length	31.0 in. (787 mm)	35.0 in. (889 mm)	45.0 in. (1143 mm)



Printed on 10% recycled paper

1.877.745.7814

For more information visit www.DoosanEquipment.com

Doosan® and the Doosan logo are registered trademarks of Doosan Corp. in the United States and various other countries around the world. ©2017 Doosan Construction Equipment. All rights reserved.

DOOSAN