

Specifications

Models	GR-26J	
Measurements	US	Metric
Working height*	31 ft 11 in	9.90 m
Platform height	25 ft 11 in	7.90 m
Horizontal reach maximum**	8 ft 3 in	2.51 m
Up-and-over clearance maximum	21 ft 10 in	6.70 m
A Platform length	2 ft 5 in	0.75 m
B Platform width	2 ft 11 in	0.90 m
Toeboard height	6 in	0.15 m
C Height - stowed	6 ft 6 in	1.99 m
D Length - stowed	9 ft 3 in	2.8 m
E Width	3 ft 3 in	0.99 m
F Wheelbase	3 ft 11 in	1.20 m
G Ground clearance - center	3.4 in	8.5 cm

Productivity

Maximum platform occupancy (indoor/outdoor)***	2/1	2/1
Lift capacity	440 lbs	200 kg
Vertical jib rotation	140° (+70°/-70°)	
Turntable rotation	350° non-continuous	
Turntable tailswing	3.8 in	95 mm
Drive speed - stowed	2.8 mph	4.5 km/h
Drive speed - raised	0.4 mph	0.65 km/h
Gradeability****	25%	
Turning radius - inside	23.5 in	0.6 m
Turning radius - outside	82.3 in	2.09 m
Controls	24V DC proportional	
Drive	dual rear wheel	
Disc brakes	dual rear wheel	
Tires (solid non-marking)	16-5-11 ¼	40.5 cm diam.



Power

Power source	24 V DC (twelve 2V batteries, 250 Ah capacity)
Hydraulic system capacity	4.84 gal 22 L

Weight*****	5,843 lbs	2,650 kg
-------------	-----------	----------

Standards Compliance	ANSI A92.20, CSA B354.4
----------------------	-------------------------

Range Of Motion GR-26J

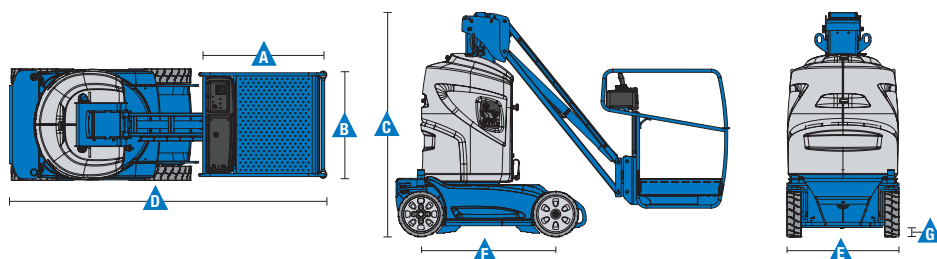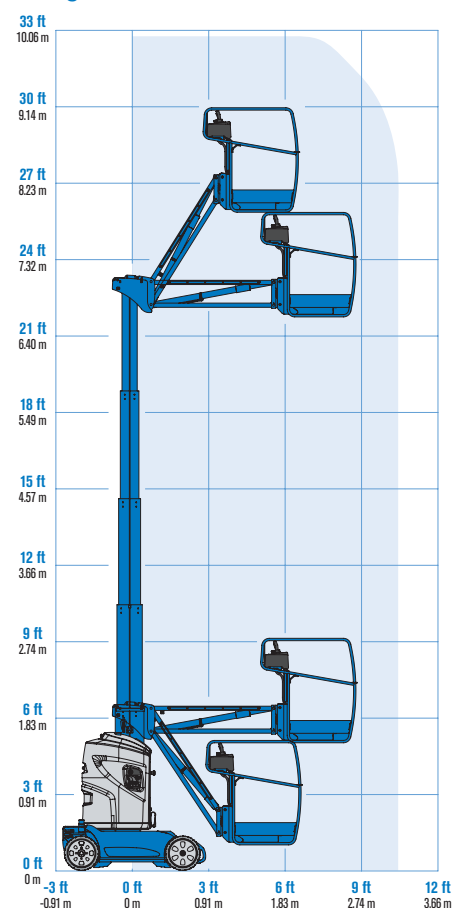

* The US equivalent of working height adds 6 ft to platform height.

** Non-working reach

*** ANSI/CSA maximum occupancy is 2 indoor and outdoor.

**** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

***** Weight will vary depending on options and/or country standards.